




SPECIFICATIONS - L35B PRO TPZ

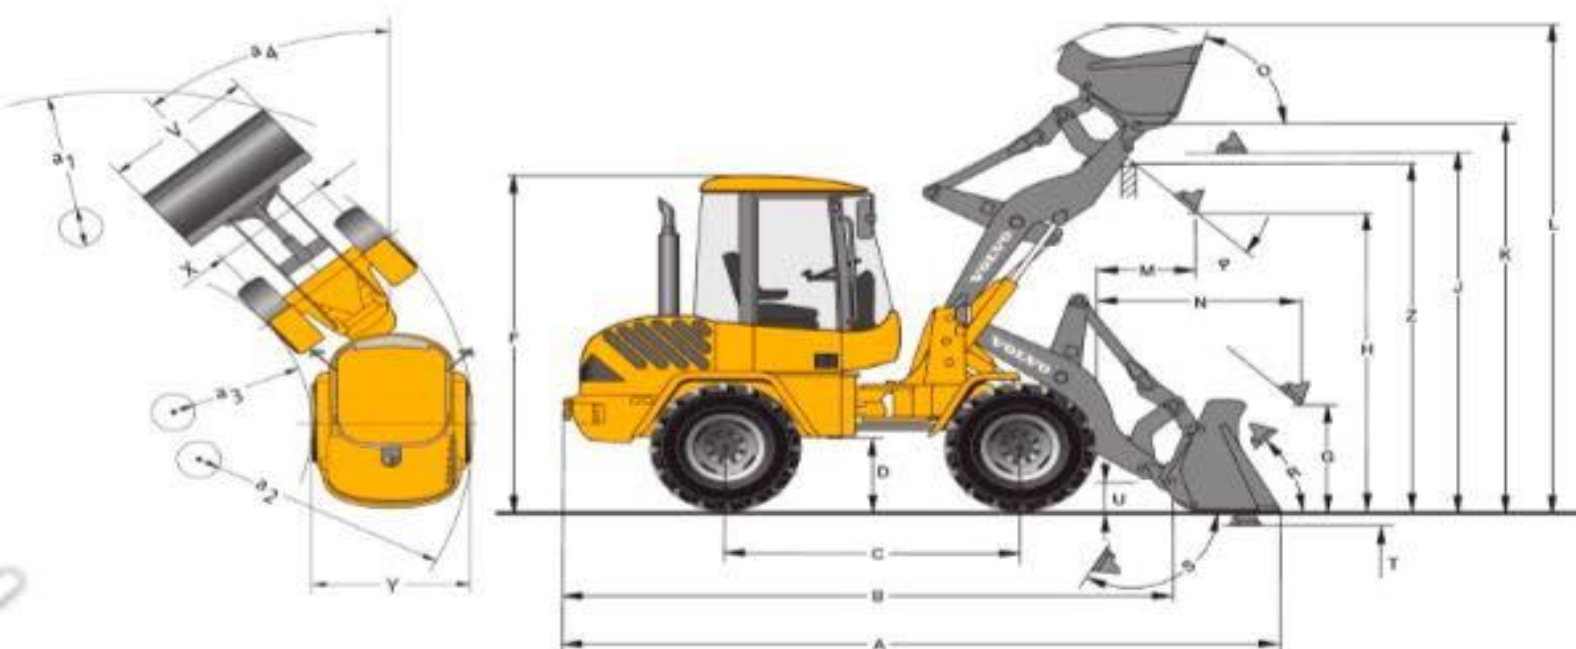

Data according to bucket type

L35B Pro with TP-linkage, Z-attachment carrier and 405/70 R20 tires

		General Purpose		4 in 1
				
Capacity heaped	m ³	1.0	1.2	0.9
Material density	kg/m ³	1800	1500	1900
Static tipping load, straight (ISO / DIS)	kg	4200	4150	3900
Static tipping load, full turn 40° (ISO / DIS)	kg	3700	3650	3450
Hydraulic lifting capacity, max.	kN	57.0	55.5	54.0
Breakout force	kN	62.5	54.5	50.0
A Total length	mm	5280	5380	5320
L Lift height, max.	mm	4290	4330	4200
V Bucket width	mm	2000	2000	2000
a ₁ Clearance circle	mm	8670	8730	8700
T Digging depth	mm	90	90	90
H Dump height	mm	2610	2535	2560
M Reach at max. height	mm	725	785	715
N Reach, max.	mm	1545	1605	1535
Operating weight	kg	6100	6120	6285

L35B Pro with TP-linkage, Z-attachment carrier and 405/70 R20 tires

B	4455	mm
C	2150	mm
D	580	mm
F	2715	mm
G	900	mm
J	3100	mm
K	3350	mm
O	63	°
P	45	°
R	50	°
S	58	°
U	250	mm
X	1532	mm
Y	1932	mm
Z	3020	mm
a ₂	3960	mm
a ₃	1980	mm
a ₄	±40	°

Data with loading fork

Centre of gravity 500 mm



Tipping load, full turn (ISO / DIS)	kg	2930
Payload according to EN 474-3, 60/80%	kg	1750/2300
Payload 80%, transport position, 40° full turn	kg	2500